


注释:

1. 线材: UL1015#12 □D3.9 红色 ;
2. 两边: 5MM 开皮留胶;


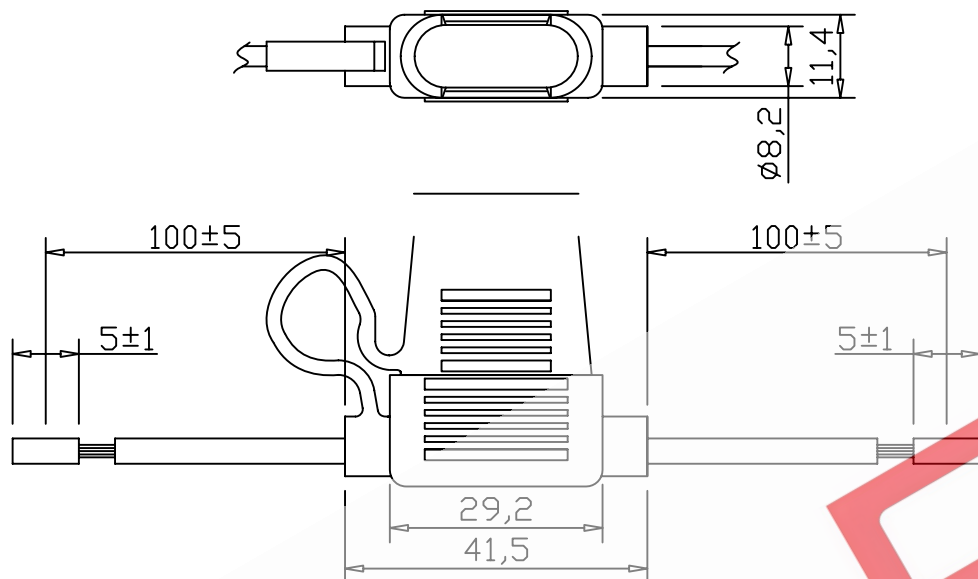


Blade type
插片式

Fuse type 保险丝类型	插片式 Blade
Rated Current 额定电流	最大40A
Insulation Resistance 绝缘电阻	100M
Contact Resistance 接触电阻	5M
Dielectric Strength 介电强度	AC 1000V Min
Body Material 壳体材料	PVC

Contact: Tin plated brass
with any wire size or lengths
available on special order.
接触: 镀锡黄铜与任何电线大小或长度
可在特殊订货。

VERSION	CHANGES	CHECKED	DATE	APPROVED	DATE
---------	---------	---------	------	----------	------

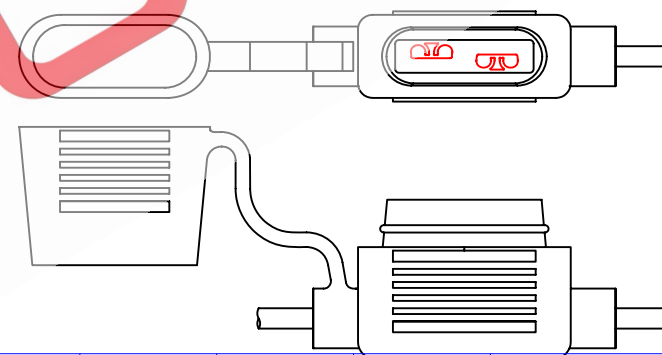

☐ RoHS	☐ REACH	☐ PAHs	☐ CPSIA	☐
☐ Original	☐ Medical	☐ UL	☐ VDE	☐

GF-708B

DONGGUAN GONGFU ELECTRONICSCO.,LTD

DESCRIPTION:			CN: GF-001	
ABO	UNT	TOL	P/N:	DATE: 2017-05-20
	10	±1	SCALE: lvbin	UNIT: 
10	50	±3		
50	100	±5		
100	500	±10		
500	1000	±30		
1000	2000	±50	SAMPLE No: SP-1062A	
DWG: FY			CHECK: HU	APPROVED: YU

NO.	DESCRIPTION	MATERIALS	VENDOR	COLOR	QTY
-----	-------------	-----------	--------	-------	-----

1

2

3

4

5

6

1234

DRAW NO:DT-00061-11-00