


(GFEFUSE® ANL-A™) Fork bolt (bolt) automobile fuse (DC fuse)

1. Dimensions (mm)

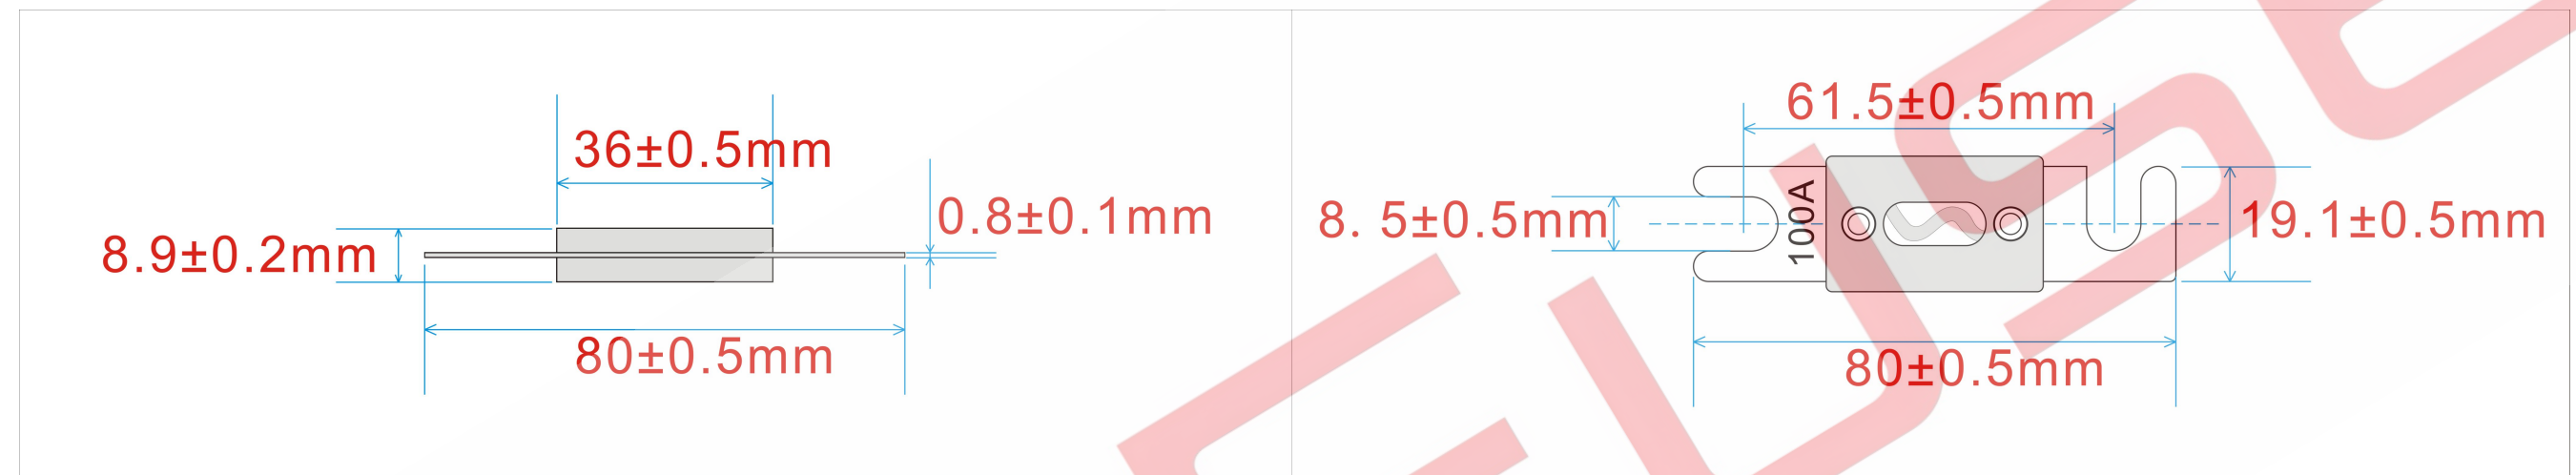

2. Specifications

Housing: Out of thermoplastic (UL 94-V0, heat-resistant) Visible melting element


Terminal: Copper alloy, gal. Sn 2 x M8 bolts, Distance 60 mm

Mounting Torque: 12.0 Nm +/- 1Nm

Breaking Capacity: 1000A, 32V 80V DC

Implementation criteria: DIN 43560/1


3.Time-Current Characteristics

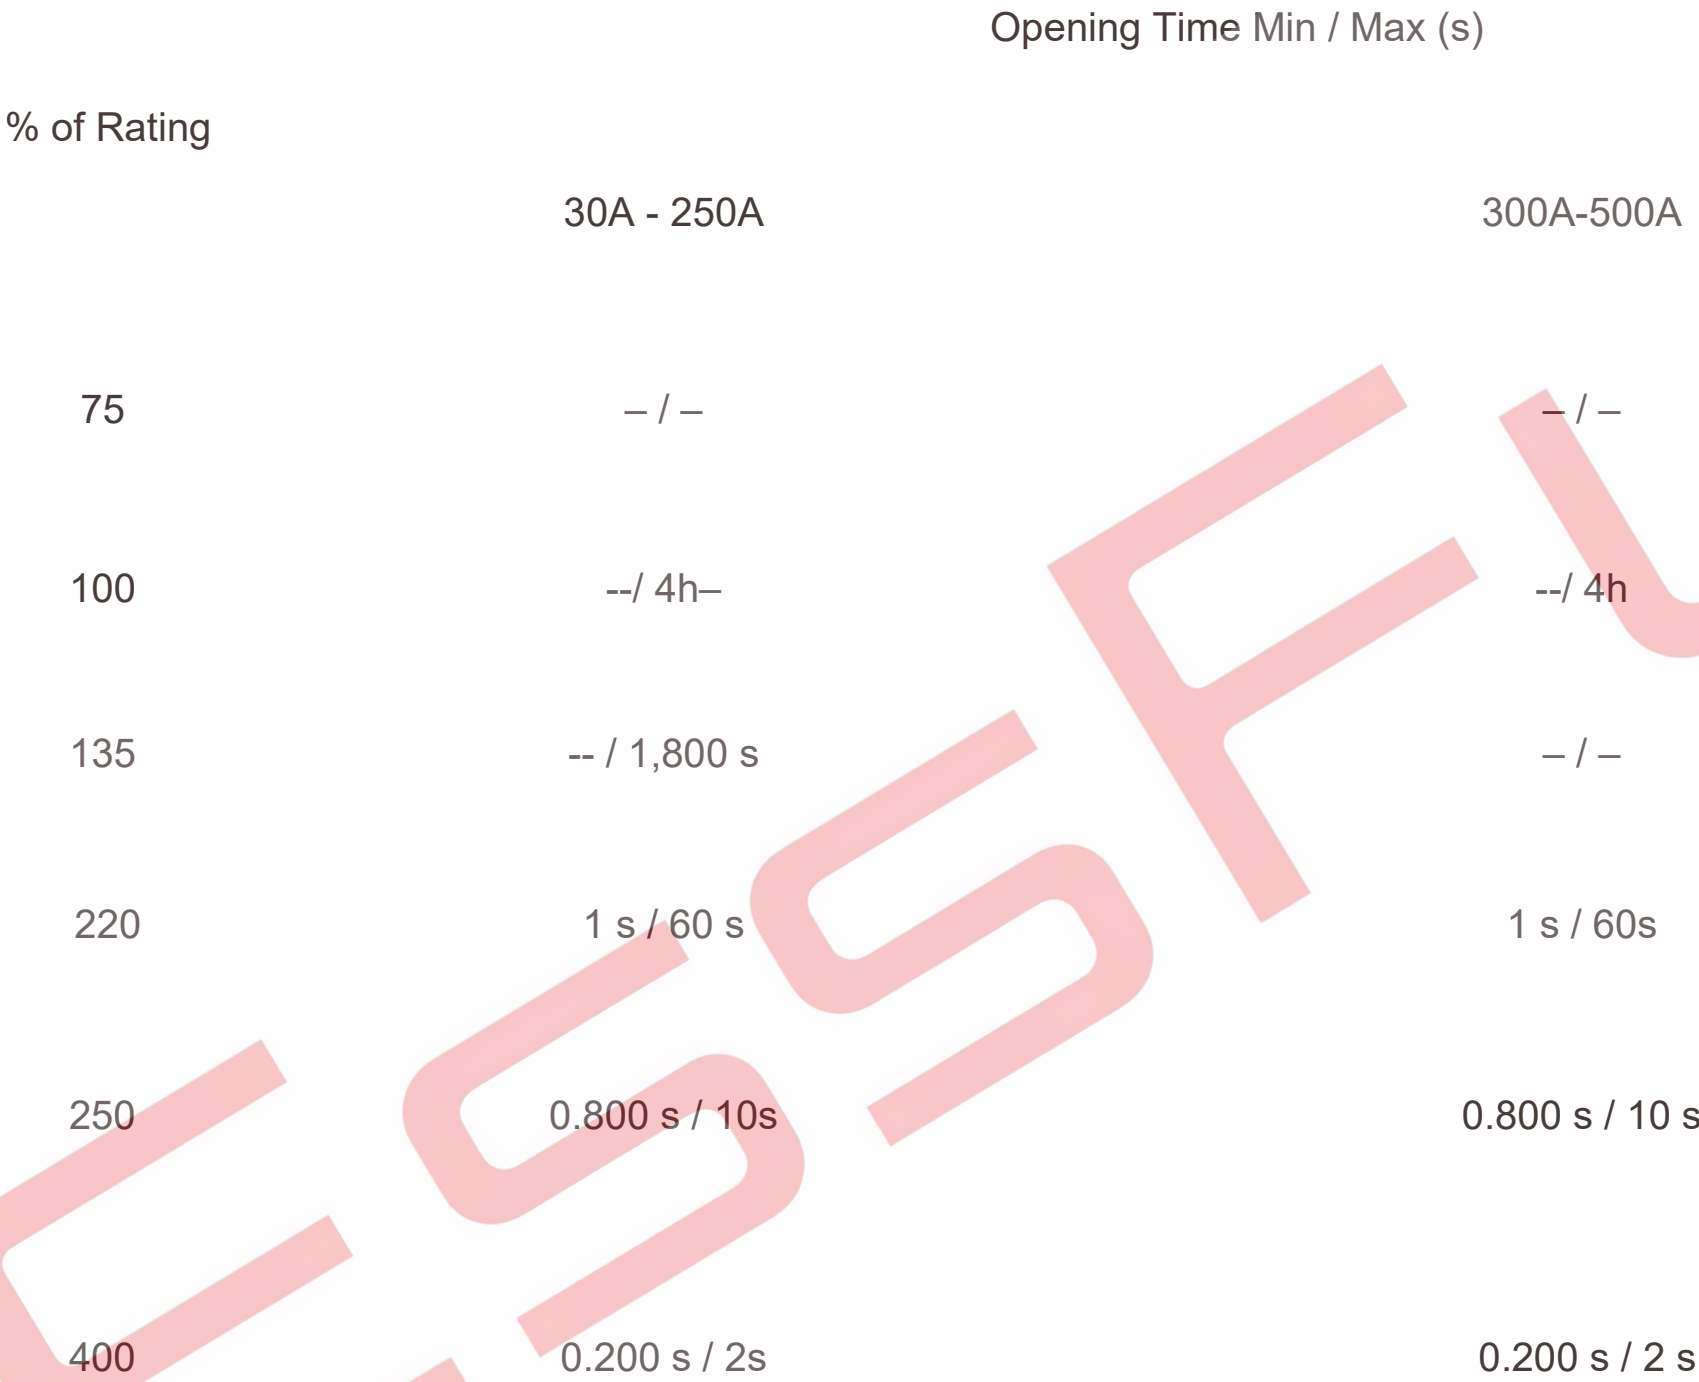

4.Ratings

TYPE	Rating Current(A)	Typ Voltage drop
ANL-A30	30A	≤150Mv
ANL-A40	40A	≤150Mv
ANL-A50	50A	≤150Mv
ANL-A60	60A	≤130mV
ANL-A80	80A	≤130mV
ANL-A100	100A	≤110mV
ANL-A125	125A	≤110mV
ANL-A150	150A	≤100mV
ANL-A175	175A	≤100mV
ANL-A200	200A	≤100mV
ANL-A250	250A	≤90mV
ANL-A300	300A	≤90mV
ANL-A350	350A	≤90mV
ANL-A400	400A	≤90mV
ANL-A500	500A	≤90mV
ANL-A600	600A	≤90mV

Operating Time Characteristics

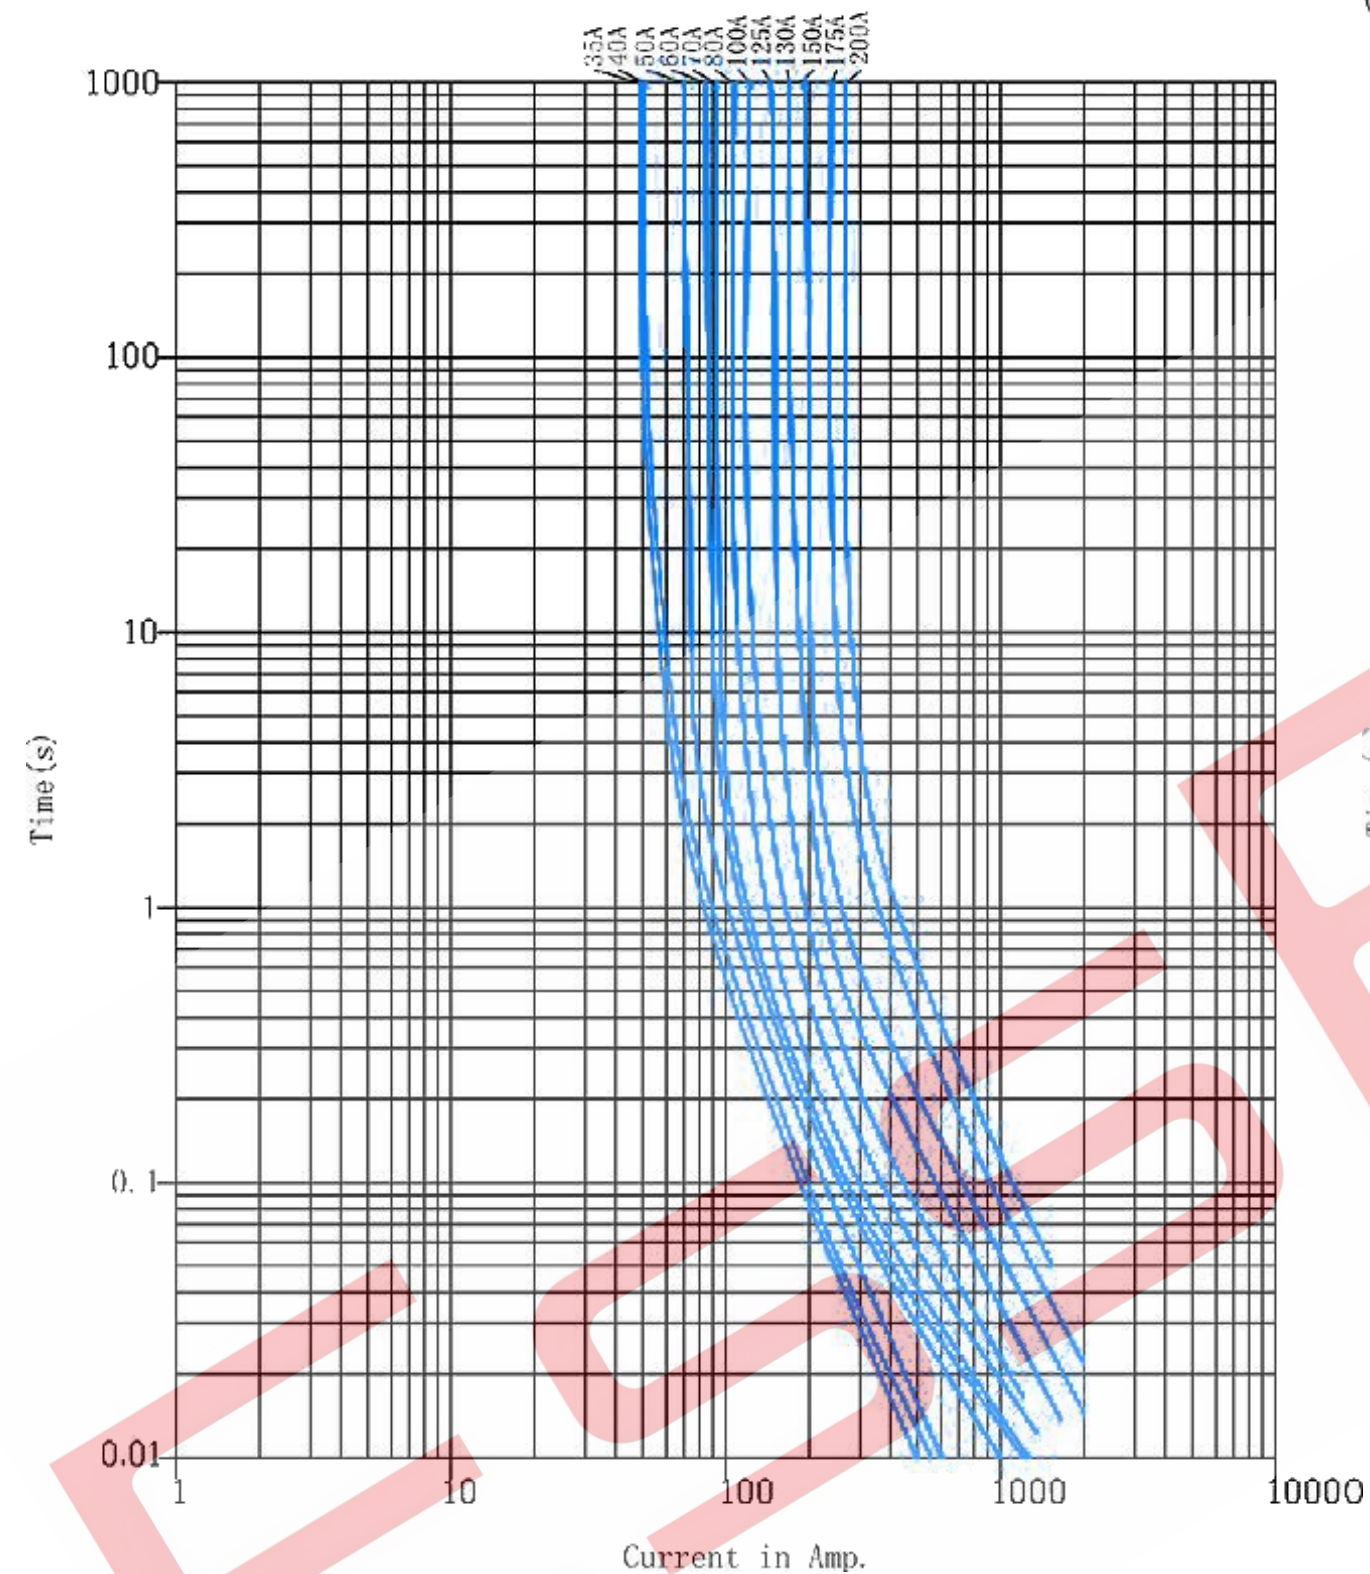

Operating Time Characteristics

