


(GFEFUSE[®])ANL-B200 SF56 Bolt-down fuse

1. Dimensions (mm)

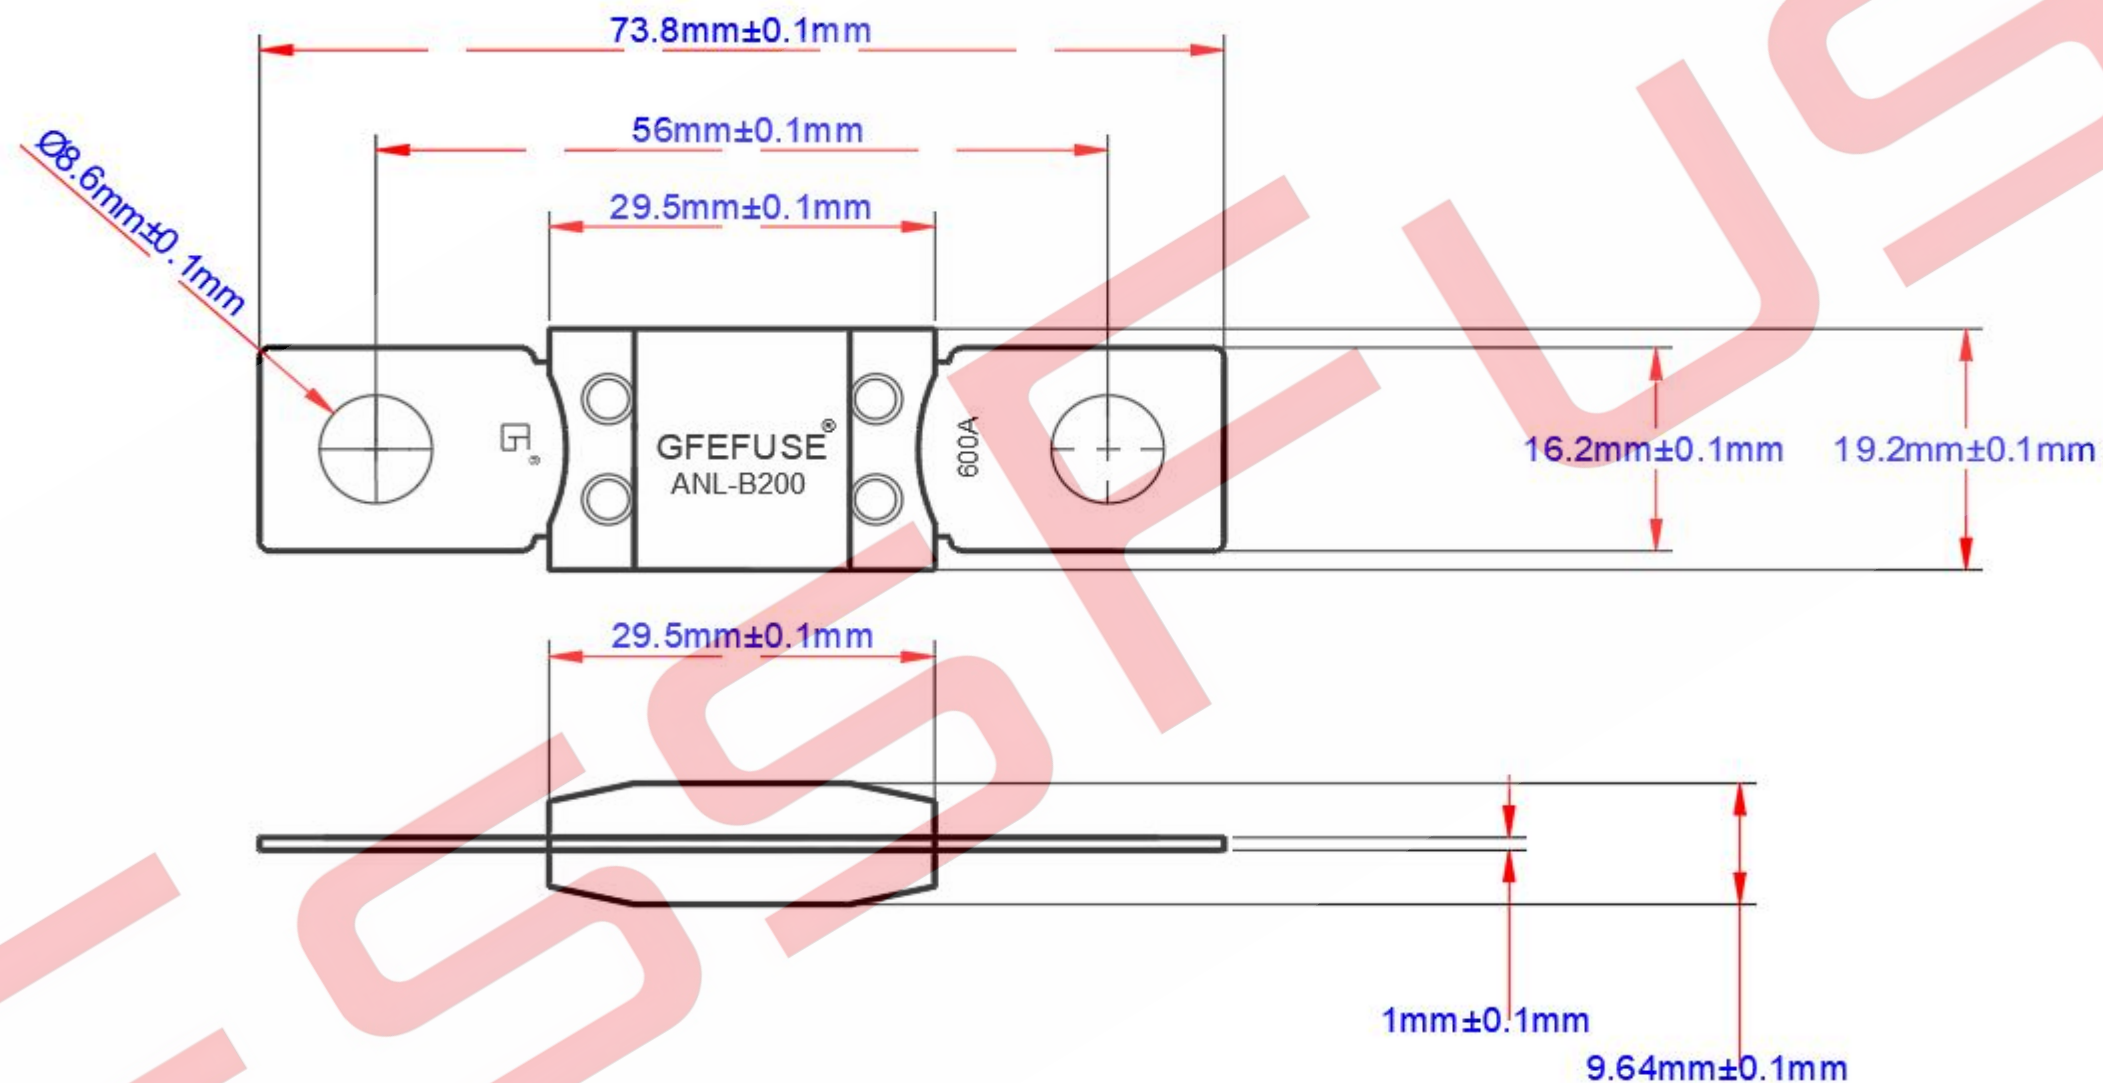

2. Specifications

Current: 60A-700A

Terminal: Copper alloy, gal. Sn 2 x M8 bolts, Distance 56 mm

Housing: Out of thermoplastic (UL 94-V0, heat-resistant)

Mounting Torque: 20 Nm +/- 1Nm

[TEL:+86 769-82391938](tel:+8676982391938)

+86 769-81100206

+86 769-82391939

<https://gfevfuse.com>

Breaking Capacity: 6000A @ 125VDC

Voltage Rating: 125VDC-250VDC

Complies with: ISO 20934-2019

Operating Temperature Range: -40°C to + 125°C(The maximum allowable temperature is 150°C at the contact point)

3.Time-Current Characteristics

% of Rating	Opening Time Min / Max (s)	
	60A - 250A	300A-700A
75	— / —	14400s
100	14400s	— / —
135	120S/1800S	— / —
150	20S/450S	— / —
200	1 s / 15s	1 s / 15 s
350	0.3 s / 5 s	0.5 s / 5s
600	0.1 s / 1 s	0.1 s / 1 s

1: Not mentioned in ISO standards

2: Short circuit protector only

3: Maximum pressure drop range according to ISO standards

4.Ratings

TYPE	Rating Current(A)	Typ Voltage drop
ANL-B200060	60A	≤110mV
ANL-B200070	70A	≤110mV
ANL-B200080	80A	≤110mV
ANL-B200100	100A	≤110mV
ANL-B200125	125A	≤110mV
ANL-B200150	150A	≤110mV
ANL-B200175	175A	≤110mV
ANL-B200200	200A	≤110mV
ANL-B200225	225A	≤110mV
ANL-B200250	250A	≤110mV
ANL-B200275	275A	≤110mV
ANL-B200300	300A	≤80mV
ANL-B200350	350A	≤80mV
ANL-B200400	400A	≤80mV
ANL-B200450	450A	≤80mV
ANL-B200500	500A	≤80mV
ANL-B200550	550A	≤80mV
ANL-B200600	600A	≤80mV
ANL-B200650	650A	≤80mV
ANL-B200700	700A	≤80mV

5.Fusion characteristics

