


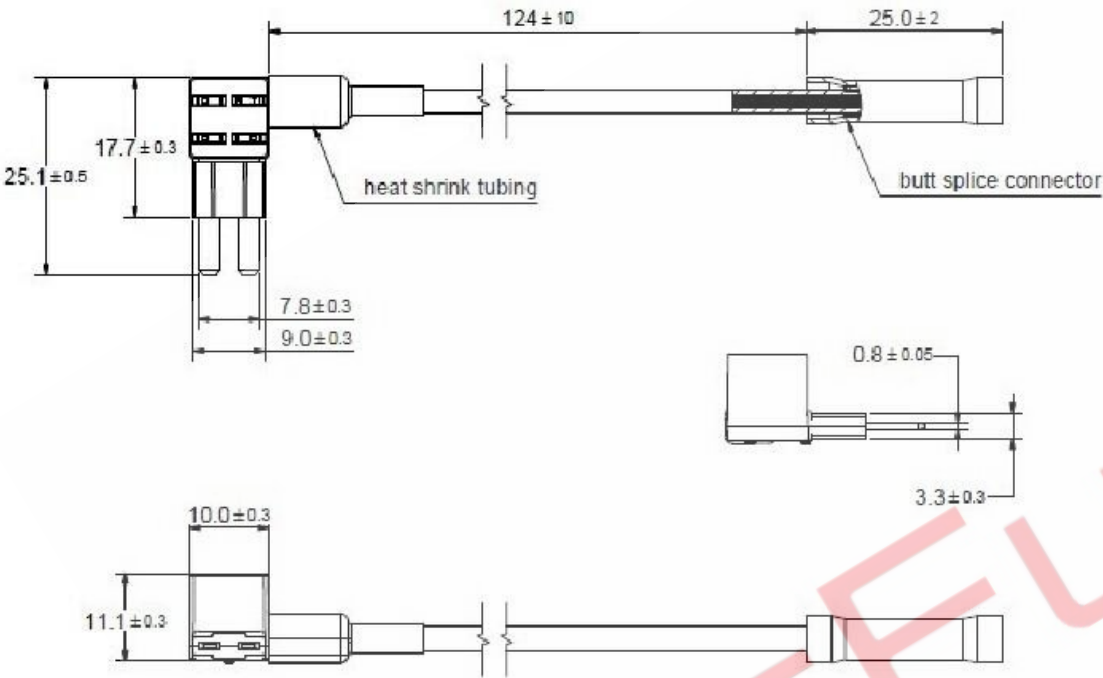

Suitable for micr 2 automobile insert fuses
Rated current: 15AMP
Flame Retardant Grade: 94V-0
Internal terminals ACN-1, ACN-2, ACN-3 (plug-in force after 6 taps is greater than 6N)
1. Wire: 1015-16AWG
2. Heat shrinkable casing: Φ6 125 degree 600V
3. Terminals: blue middle terminal
4. Product Name: GF-70BC(GFEFUSE)
Remarks:
No seamless burr in hot-bonding is clean, the terminal is pressed firmly without breaking line, no short circuit, breaking circuit, dislocation, good conduction, and no damage to the line skin.

Corporate name	DongGuang GongFu electronics co ., ltd	Modify content		Approval	To examine	Drawing
Product name	Electrical appliances	1015-16AWG L=150±8MM		bing	bing	bing
Model	GF-70BM	Drawing time	2016-05-12	Company	mm	