


GF-C41B Mini blade fuse holder (SMD)

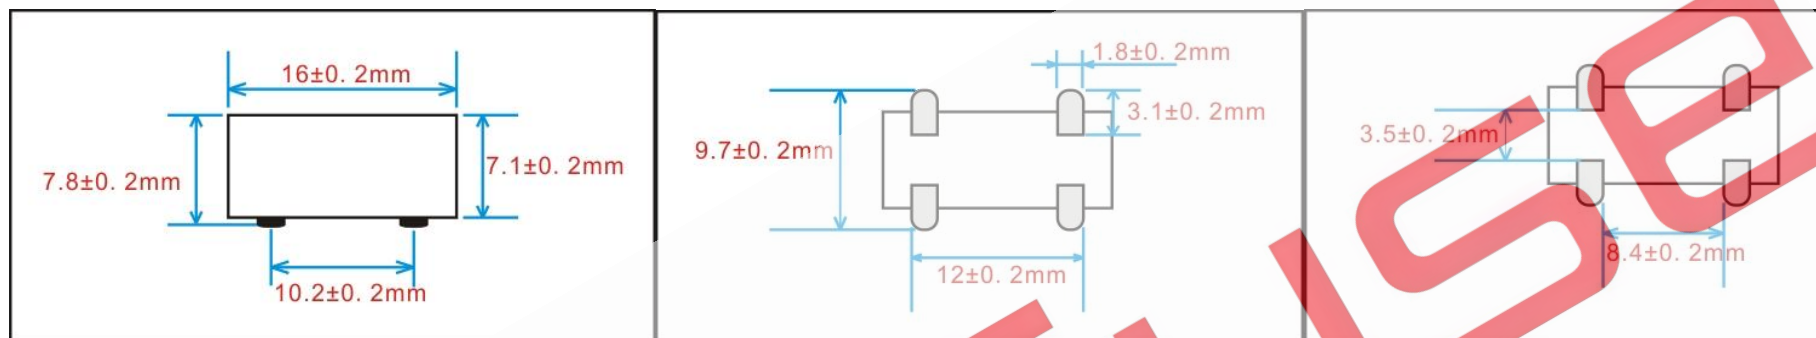

Product introduction

1. material: Contacts-brass, $T=0.4\text{mm}$
Insulator-Glass Filled PBT, Base:UL-94V0
2. terminal finish: Tin plated
3. MINI auto plug fuse
4. Suitable rated current: $30\text{A}@500\text{V AC}$
5. Insertion and extraction force: 1Kg Min
6. Dielectric Strength :Min AC 1000V
7. Contact Resistance:Max $50\text{m}\Omega$
8. Temperature rise: 50° Max
9. Insulation Resistance At 500V DC : $100\text{M}\Omega$

Attention:Product size changes are not notified