

1 2 3 4 5 6 7 8

DRAWING REVISIONS				
REV	S/N	DESCRIPTION	APPROVED	DATE
A	20080210-09	ORIGINAL RELEASE		

F


E

D

C

B

A

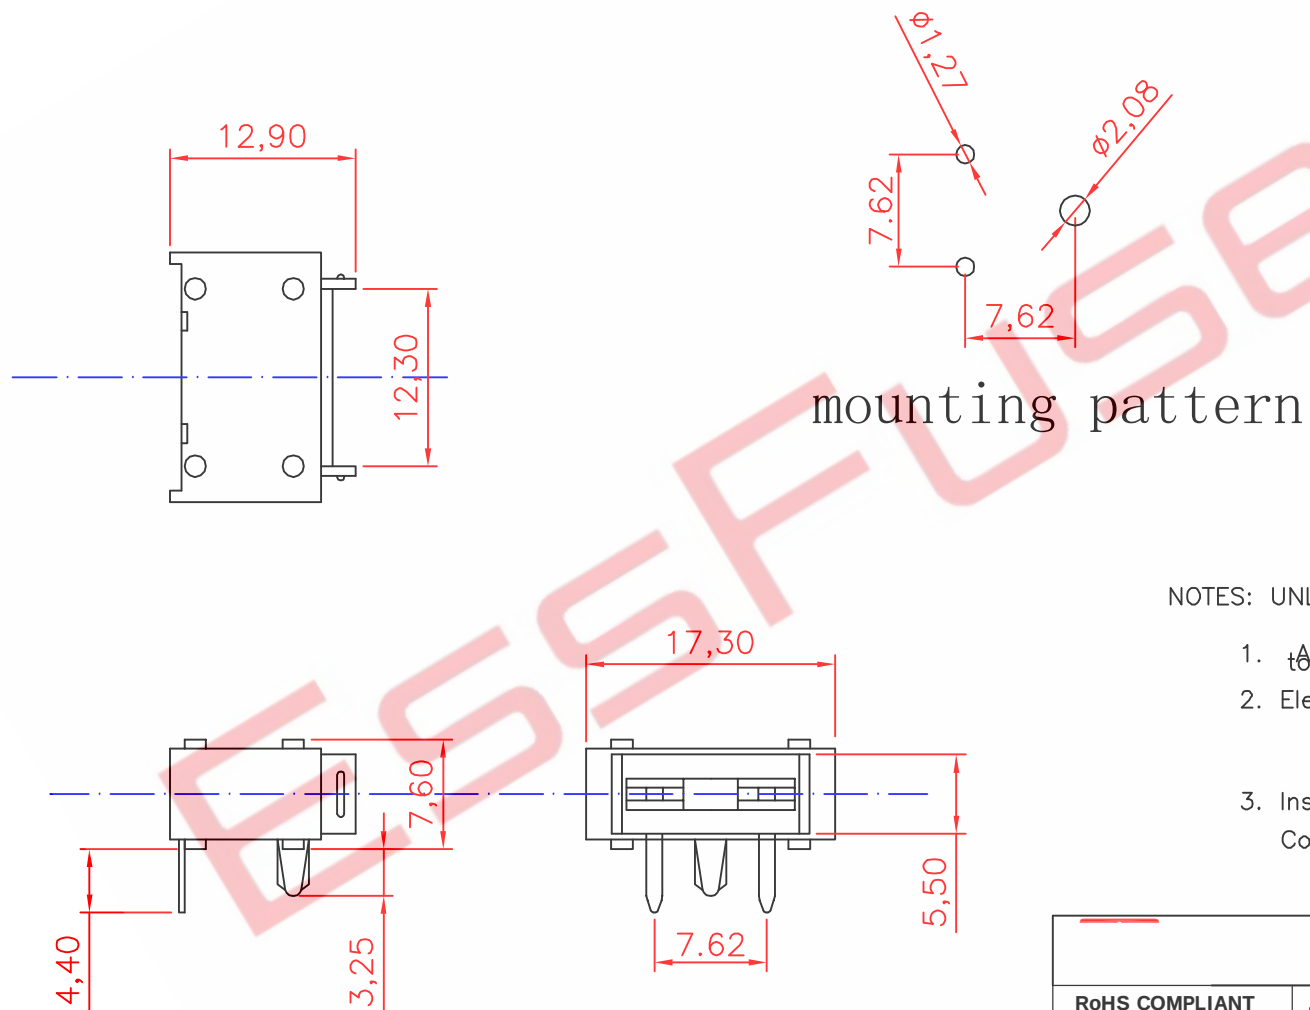

NOTES: UNLESS OTHERWISE SPECIFIED.

1. Applicable For MINI blade fuse.
to 15A/32VAC
2. Electrical: Rated for current up
3. Insulating Base body: PA +30%GP
Contact: Brass with Tin plated

RoHS COMPLIANT		PCB Mount Fuseholder FOR MINI AUTO FUSE				CUSTOMER	
UNLESS OTHERWISE STATED							
WALL THICKNESS				MM			
LINEAR	.XX	± 0.15		MM			
	.XXX	± 0.05		MM			
ANGULAR		± 0.5		DEG			
DRAFT ANGLE/SIDE		0.5 ° MAX					
BURR & FLASH		0.10		MAX			
BREAK CORNERS		0.20		R.MAX			
PARTING LINE MISMATCH		0.05		MAX			
		DSGN		12-22-08	SCALE	free	
		DFTS		12-22-08	SHEET	1 OF 1	
		CHKD			PART NO.		REV
		APPD			1537		A

1 2 3 4 5 6 7 8