
A:Mechanical drawings of products

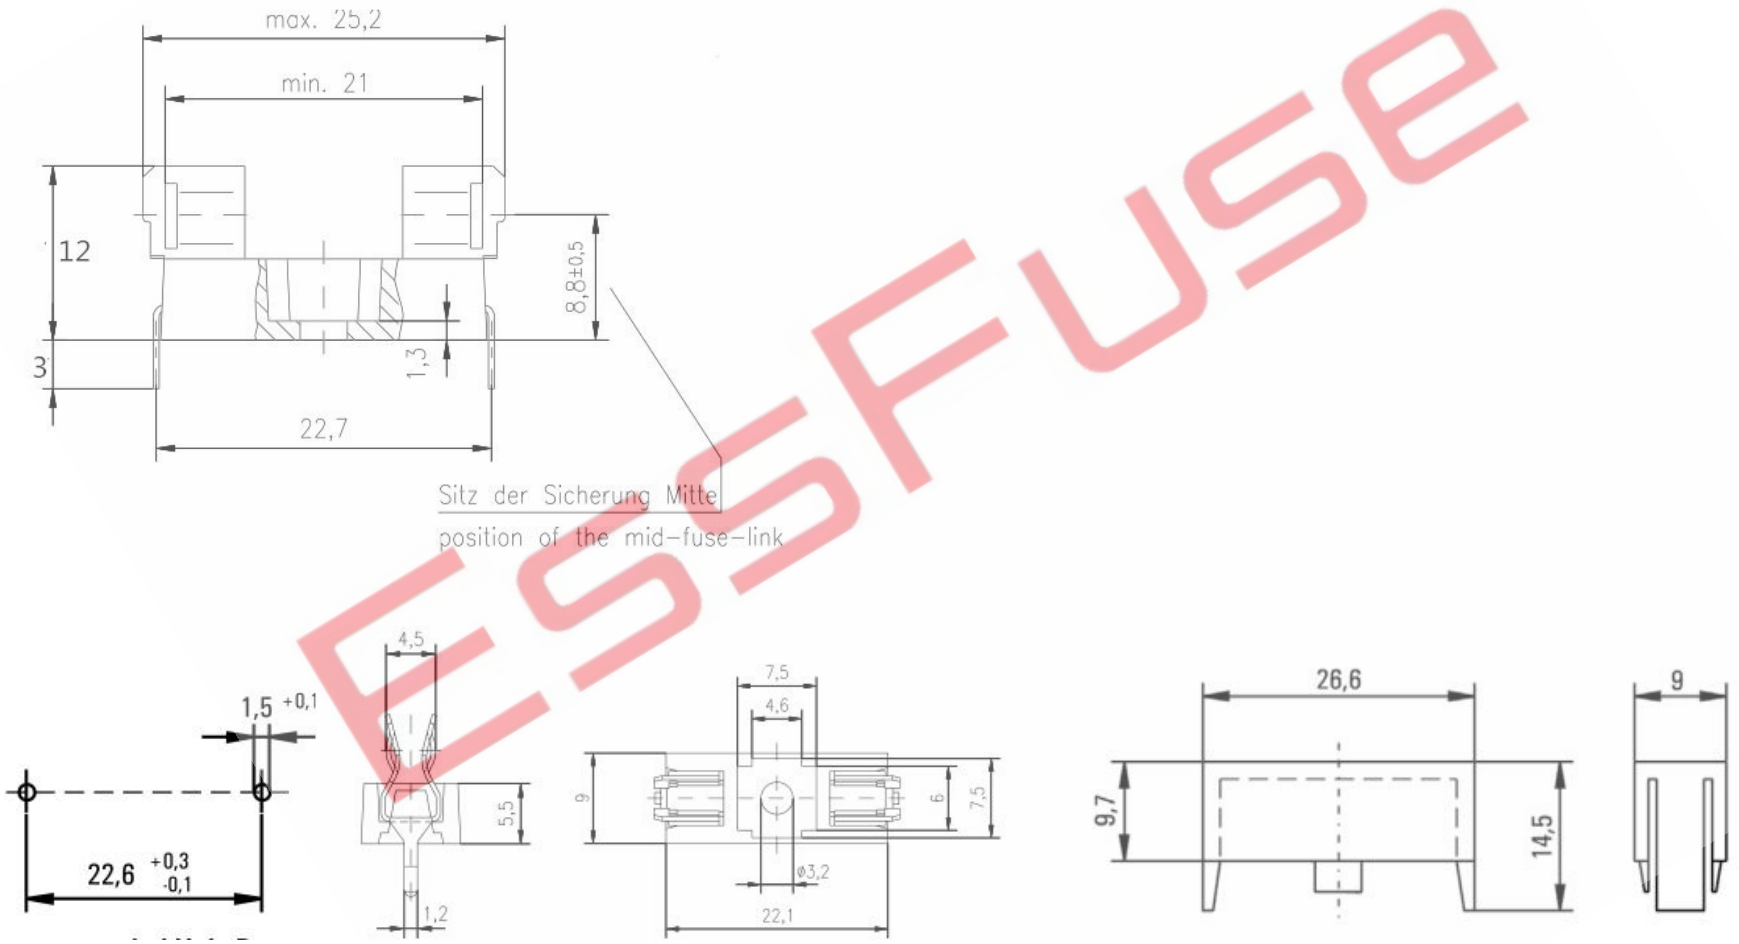

EssFuse

B:Detailed description of the product

1.Product model: PTF(15)
2.rated current: 10A/10A 1.6w
4.rated voltage: 250V/125V (AC/DC)
5.split current: 50A
6.Base: Black PBT (UL-94V0)
Protective cover: transparent PC
7.terminal: 0.4mm (phosphor)
8.withstand voltage: 3000VAC
9.contact resistance：<5mΩ
10.insulation resistance：>100MΩ
11.Product safety certification:TUV CE CQC UL

C:Packaging requirements

A: pedestal 500PCS/ bag
B: transparent protection cover 500PCS/ bag
C:5000pcs/ box

Note: Product changes are not notified

EssFuse