


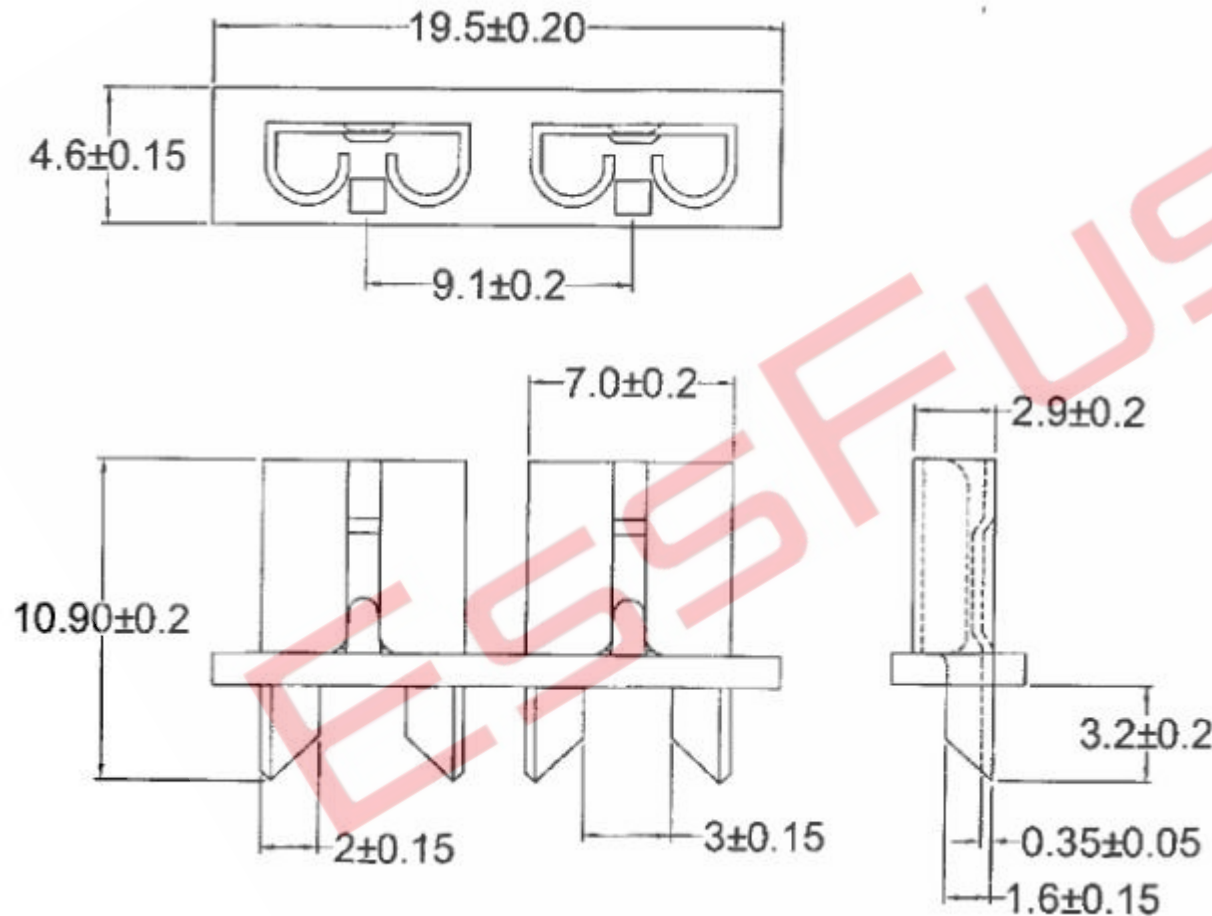

A: Product range

1. The voltage is set below AC250V.  
Withstand pressure below 40A

2. Applicable to medium insert fuse

3. Contact: 20M $\omega$

4. Insertion force: initial insertion  
below 2KGS

5. Initially insert 0.5-2kgs

B: after the test

1. Contact: 20M $\omega$

2. Initial insertion force is more than  
500

C: product model: GF-718 ATO blade  
fuse holder clip