


Dongguan GongFu Electronics Co.Ltd. **EssFuse** Focus: fuse holder and fuse

GF-717N mini Low Profile Blade Fuse holder

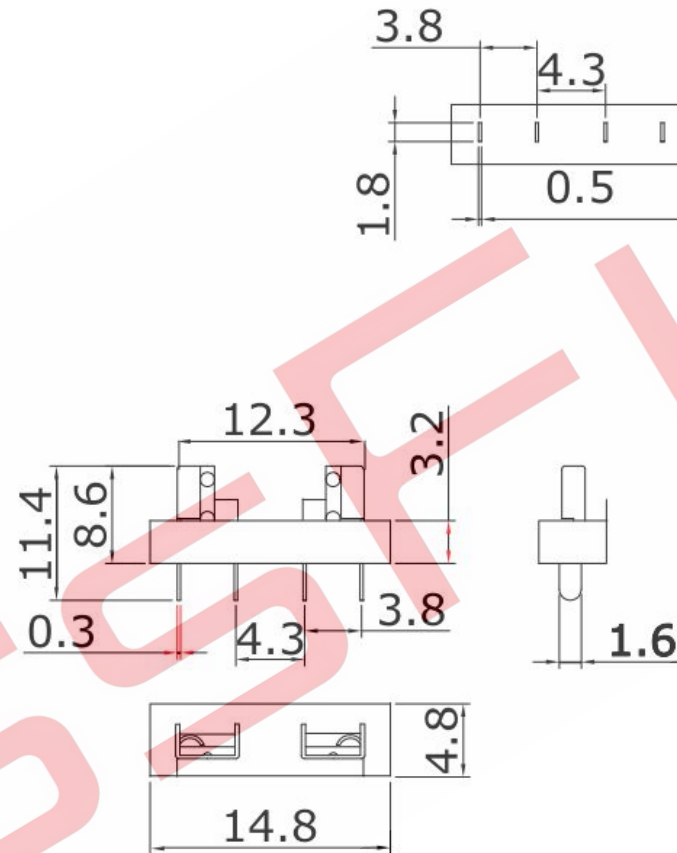

Product Specifications

1. Materials: Hardware—Brass, thickness $T=0.30\text{mm}$;
Base: Glass fiber reinforced PBT, 94-V0 grade;
2. Terminal finish: Tin plating;
3. Remove burrs and sharp edges.
4. Suitable for low-profile mini blade fuses.
6. Rated current: 30A @ 250VAC.
7. Insertion/withdrawal force: 1kg minimum.
8. Dielectric strength: AC500V minimum.
9. Contact resistance: $50\text{m}\Omega$ maximum.
10. Operating temperature range: -40°C to $+115^{\circ}\text{C}$.
11. Insulation resistance (DC 500V): $100\text{M}\Omega$.