
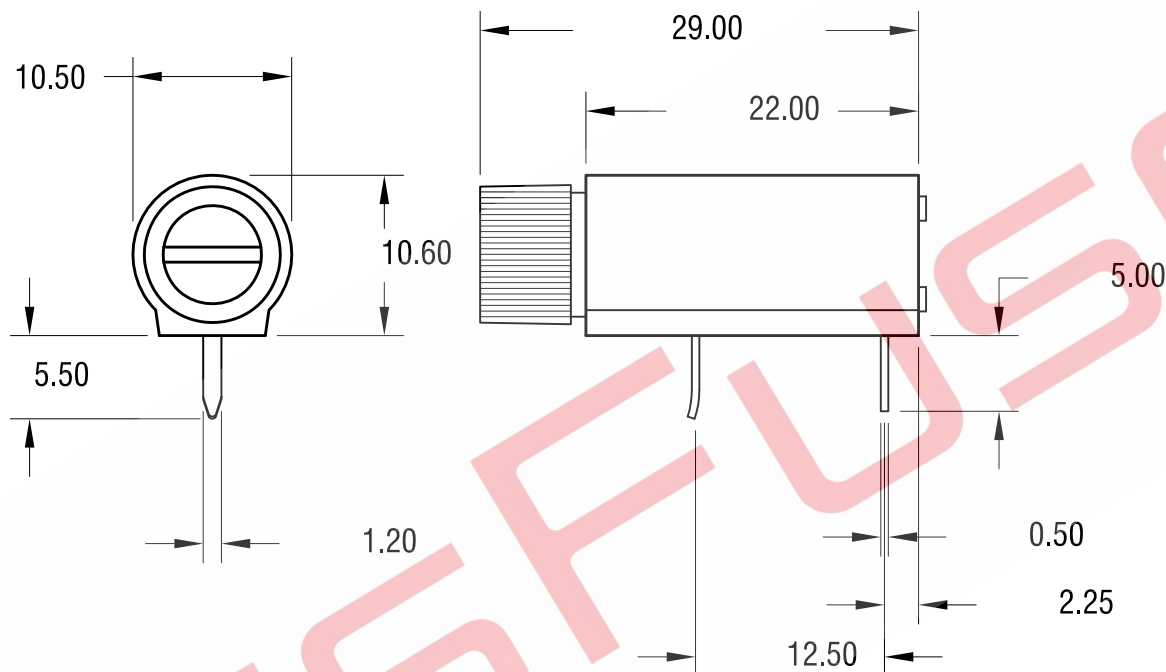





NOTE:

1. MAT'L: PBT
2. CONTACTS: MAT'L: BRASS, TIN PLATE
3. END CAP AND BODY SUPPLIED UNASSEMBLED
4. SUITABLE RATE CURRENT: 10A 250V AC Max.
5. DIELECTRIC STRENGTH FOR 60 SECONDS: AC3000V Min.
6. CONTACT RESISTANCE AT 1A DC: 5m Ω Max.
7. INSULATION RESISTANCE AT 500V DC: 100M Ω Min.

Dongguan Gongfu Electronics Co., Ltd.			
PART NAME			
5.2x20 MM PCB fuse holder			
MATERIAL			
AS NOTED			
ROHS	DRN BY	DATE 2018.5.25	
	APP'D	SCALE 2X	
TOLERANCES	INCH	[MM]	CODE
DECIMAL	$\pm .010$	$[\pm 0.25]$	C
ANGULAR	$\pm 1^\circ$		
UNLESS OTHERWISE SPECIFIED			DWG NO.
			PTF-50A